


NPN SILICON PLANAR EPITAXIAL TRANSISTORS

**BC237,238, A,B,C
 BC239, B,C**

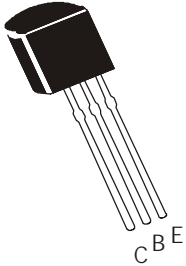

**TO-92
 Plastic Package**
 For Lead Free Parts, Device
 Part # will be Prefixed with
 "T"

Amplifier Transistors

ABSOLUTE MAXIMUM RATINGS (T_a=25°C)

DESCRIPTION	SYMBOL	BC237	BC238	BC239	UNITS
Collector Emitter Voltage	V _{CEO}	45	25	25	V
Collector Emitter Voltage	V _{CES}	50	30	30	V
Emitter Base Voltage	V _{EBO}	6.0	5.0	5.0	V
Collector Current Continuous	I _C	100			mA
Power Dissipation at T _a =25°C	P _D	350			mW
Derate Above 25°C		2.8			mW/°C
Power Dissipation at T _c =25°C	P _D	1.0			W
Derate Above 25°C		8.0			mW/°C
Operating And Storage Junction Temperature Range	T _j , T _{stg}	- 55 to +150			°C

THERMAL RESISTANCE


Junction to Ambient in free air	R _{th (j-a)}	357	°C/W
Junction to Case	R _{th (j-c)}	125	°C/W

ELECTRICAL CHARACTERISTICS (T_a=25°C unless specified otherwise)

DESCRIPTION	SYMBOL	TEST CONDITION	MIN	MAX	UNITS
Collector Emitter Voltage	V _{CEO}	I _C =2mA, I _B =0			
		BC237	45		V
		BC238/BC239	25		V
Emitter Base Voltage	V _{EBO}	I _E =10µA, I _C =0			
		BC237	6.0		V
		BC238/BC239	5.0		V
Collector Cut Off Current	I _{CES}	BC238/BC239		15	nA
		V _{CE} =30V, V _{BE} =0			
		BC237		15	nA
		V _{CE} =50V, V _{BE} =0			
		BC238/BC239		4.0	µA
		V _{CE} =30V, V _{BE} =0, T _a =125°C			
		BC237		4.0	µA
		V _{CE} =50V, V _{BE} =0, T _a =125°C			

NPN SILICON PLANAR EPITAXIAL TRANSISTORS

BC237,238, A,B,C
BC239, B,C

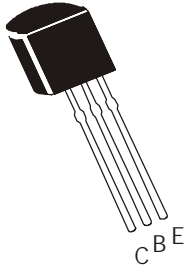

TO-92
Plastic Package
For Lead Free Parts, Device
Part # will be Prefixed with
"T"

ELECTRICAL CHARACTERISTICS (T_a=25°C unless specified otherwise)

DESCRIPTION	SYMBOL	TEST CONDITION	MIN	MAX	UNITS	
DC Current Gain	h _{FE}	I _C =10μA, V _{CE} =5V				
		A		TYP90		
		B		TYP150		
		C		TYP270		
		I _C =2mA, V _{CE} =5V				
		BC237/238/239				
A		120	800			
B		120	220			
C		200	460			
			380	800		
		*I _C =100mA, V _{CE} =5V				
A				TYP120		
B				TYP180		
C				TYP300		
Collector Emitter Saturation Voltage	V _{CE (sat)}	I _C =10mA, I _B =0.5mA		0.20	V	
		*I _C =100mA, I _B =5mA				
		BC237/239		0.60	V	
		BC238		0.80	V	
Base Emitter Saturation Voltage	V _{BE (sat)}	I _C =10mA, I _B =0.5mA		0.83	V	
		*I _C =100mA, I _B =5mA		1.05	V	
Base Emitter On Voltage	V _{BE (on)}	I _C =2mA, V _{CE} =5V	0.55	0.70	V	


SMALL SIGNAL CHARACTERISTICS

DESCRIPTION	SYMBOL	TEST CONDITION	MIN	MAX	UNITS
Transistors Frequency	f _T	I _C =0.5mA, V _{CE} =3V, f=100MHz			
		BC237		TYP100	MHz
		BC238		TYP120	MHz
		BC239		TYP140	MHz
		I _C =10mA, V _{CE} =5V, f=100MHz	150		MHz
Collector Output Capacitance	C _{ob}	V _{CB} =10V, I _E =0, f=1MHz		4.5	pF
Emitter Input Capacitance	C _{ib}	V _{EB} =0.5V, f=1MHz		TYP8	pF
Noise Figure	NF	V _{CE} =5V, I _C =0.2mA, R _S =2KΩ, f=1KHz, B=200Hz			
		BC237/238		10	dB
		BC239		4.0	dB

*Pulse Test: Pulse Width ≤ 300ms, Duty Cycle ≤ 2%


BC237_239Rev_1 201205E

TO-92 Plastic Package

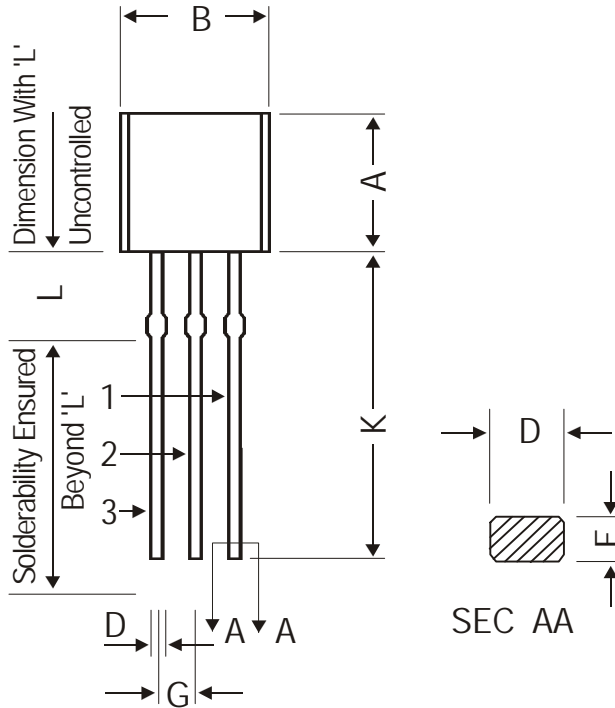


DIM	MIN.	MAX.
A	4.32	5.33
B	4.45	5.20
C	3.18	4.19
D	0.41	0.55
E	0.35	0.50
F	5 DEG	
G	1.14	1.40
H	1.20	1.40
K	12.70	—
L	1.982	2.082
M	1.03	1.20

All dimensions are in mm

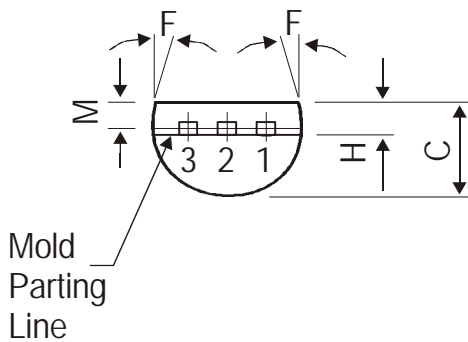

PIN CONFIGURATION

1. EMITTER
2. BASE
3. COLLECTOR

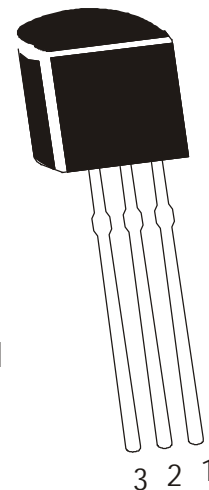

The TO-92 Package , Tape and Ammo Pack drawings are correct as on the date of issue/revision of this Data Sheet.


The currently valid dimensions and information, may please be confirmed from the TO-92 Drawing in the Packages and Packing Section of the Product Catalogue.

Packing Details

PACKAGE	STANDARD PACK		INNER CARTON BOX		OUTER CARTON BOX		
	Details	Net Weight/Qty	Size	Qty	Size	Qty	Gr Wt
TO-92 Bulk	1K/polybag	200 gm/1K pcs	3" x 7.5" x 7.5"	5K	17" x 15" x 13.5"	80K	23 kgs
TO-92 T&A	2K/ammo box	645 gm/2K pcs	12.5" x 8" x 1.8"	2K	17" x 15" x 13.5"	32K	12.5 kgs

TO-92
Plastic Package
For Lead Free Parts, Device
Part # will be Prefixed with
"T"

TO-92 Tape and Ammo Pack

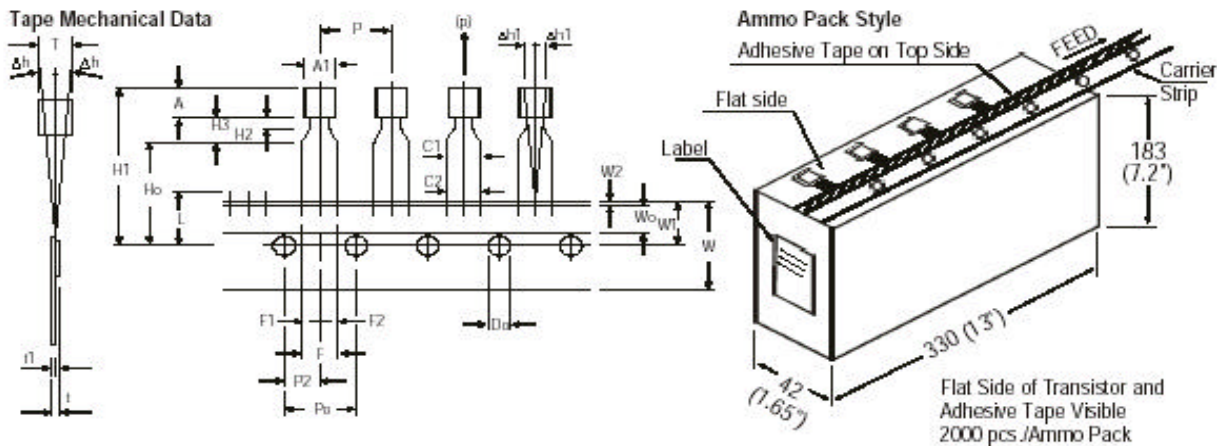

All dimensions are in mm

ITEM	SYMBOL	SPECIFICATION			
		MIN.	NOM.	MAX.	TOL.
BODY WIDTH	A1	4.45		5.20	
BODY HEIGHT	A	4.32		5.33	
BODY THICKNESS	T	3.18		4.19	
PITCH OF COMPONENT	P		12.7		± 1.0
*1 FEED HOLE PITCH	Po		12.7		± 0.3
*2 FEED HOLE CENTRE TO COMPONENT CENTRE	P2		6.35		± 0.4
DISTANCE BETWEEN OUTER LEADS	F		5.08		+0.6 -0.2
*3 COMPONENT ALIGNMENT SIDE VIEW	Δh		0	1.0	
*4 COMPONENT ALIGNMENT FRONT VIEW	$\Delta h1$		0	1.3	
TAPE WIDTH	W		18		± 0.5
HOLD-DOWN TAPE WIDTH	W0		6		± 0.2
HOLE POSITION	W1		9		+0.7 -0.5
HOLD-DOWN TAPE POSITION	W2	0.0		0.7	
LEAD WIRE CLINCH HEIGHT	Ho		16		± 0.5
COMPONENT HEIGHT	H1			24.0	
LENGTH OF SNIPPED LEADS	L			11.0	
FEED HOLE DIAMETER	Do		4		± 0.2
*5 TOTAL TAPE THICKNESS	t			1.2	
LEAD - TO - LEAD DISTANCE	F1, F2	2.40		2.70	-0.1
STAND OFF	H2	0.45		1.45	
CLINCH HEIGHT	H3			3.0	
LEAD PARALLELISM	C1 - C2			0.22	
PULL - OUT FORCE	(p)	6N			

NOTES

1. Maximum alignment deviation between leads will not to be greater than 0.2mm.
2. Maximum non-cumulative variation between tape feed holes shall not exceed 1 mm in 20 pitches.
3. Holddown tape will not exceed beyond the edge(s) of carrier tape and there shall be no exposure of adhesive.
4. There will be no more than three (3) consecutive missing components in a tape.
5. A tape trailer, having at least three feed holes are provided after the last component in a tape.
6. Splices should not interfere with the sprocket feed holes.

REMARKS

- *1 Cumulative pitch error 1.0 mm/20 pitch
- *2 To be measured at bottom of clinch
- *3 At top of body
- *4 At top of body
- *5 t1 0.3 – 0.6 mm

Component Disposal Instructions

1. CDIL Semiconductor Devices are RoHS compliant, customers are requested to please dispose as per prevailing Environmental Legislation of their Country.
2. In Europe, please dispose as per EU Directive 2002/96/EC on Waste Electrical and Electronic Equipment (WEEE).

Disclaimer

The product information and the selection guides facilitate selection of the CDIL's Semiconductor Device(s) best suited for application in your product(s) as per your requirement. It is recommended that you completely review our Data Sheet(s) so as to confirm that the Device(s) meet functionality parameters for your application. The information furnished in the Data Sheet and on the CDIL Web Site/CD are believed to be accurate and reliable. CDIL however, does not assume responsibility for inaccuracies or incomplete information. Furthermore, CDIL does not assume liability whatsoever, arising out of the application or use of any CDIL product; neither does it convey any license under its patent rights nor rights of others. These products are not designed for use in life saving/support appliances or systems. CDIL customers selling these products (either as individual Semiconductor Devices or incorporated in their end products), in any life saving/support appliances or systems or applications do so at their own risk and CDIL will not be responsible for any damages resulting from such sale(s).

CDIL strives for continuous improvement and reserves the right to change the specifications of its products without prior notice.



CDIL is a registered Trademark of
Continental Device India Limited

C-120 Naraina Industrial Area, New Delhi 110 028, India.

Telephone + 91-11-2579 6150, 5141 1112 Fax + 91-11-2579 5290, 5141 1119
email@cdil.com www.cdilsemi.com