


GX20 Connector

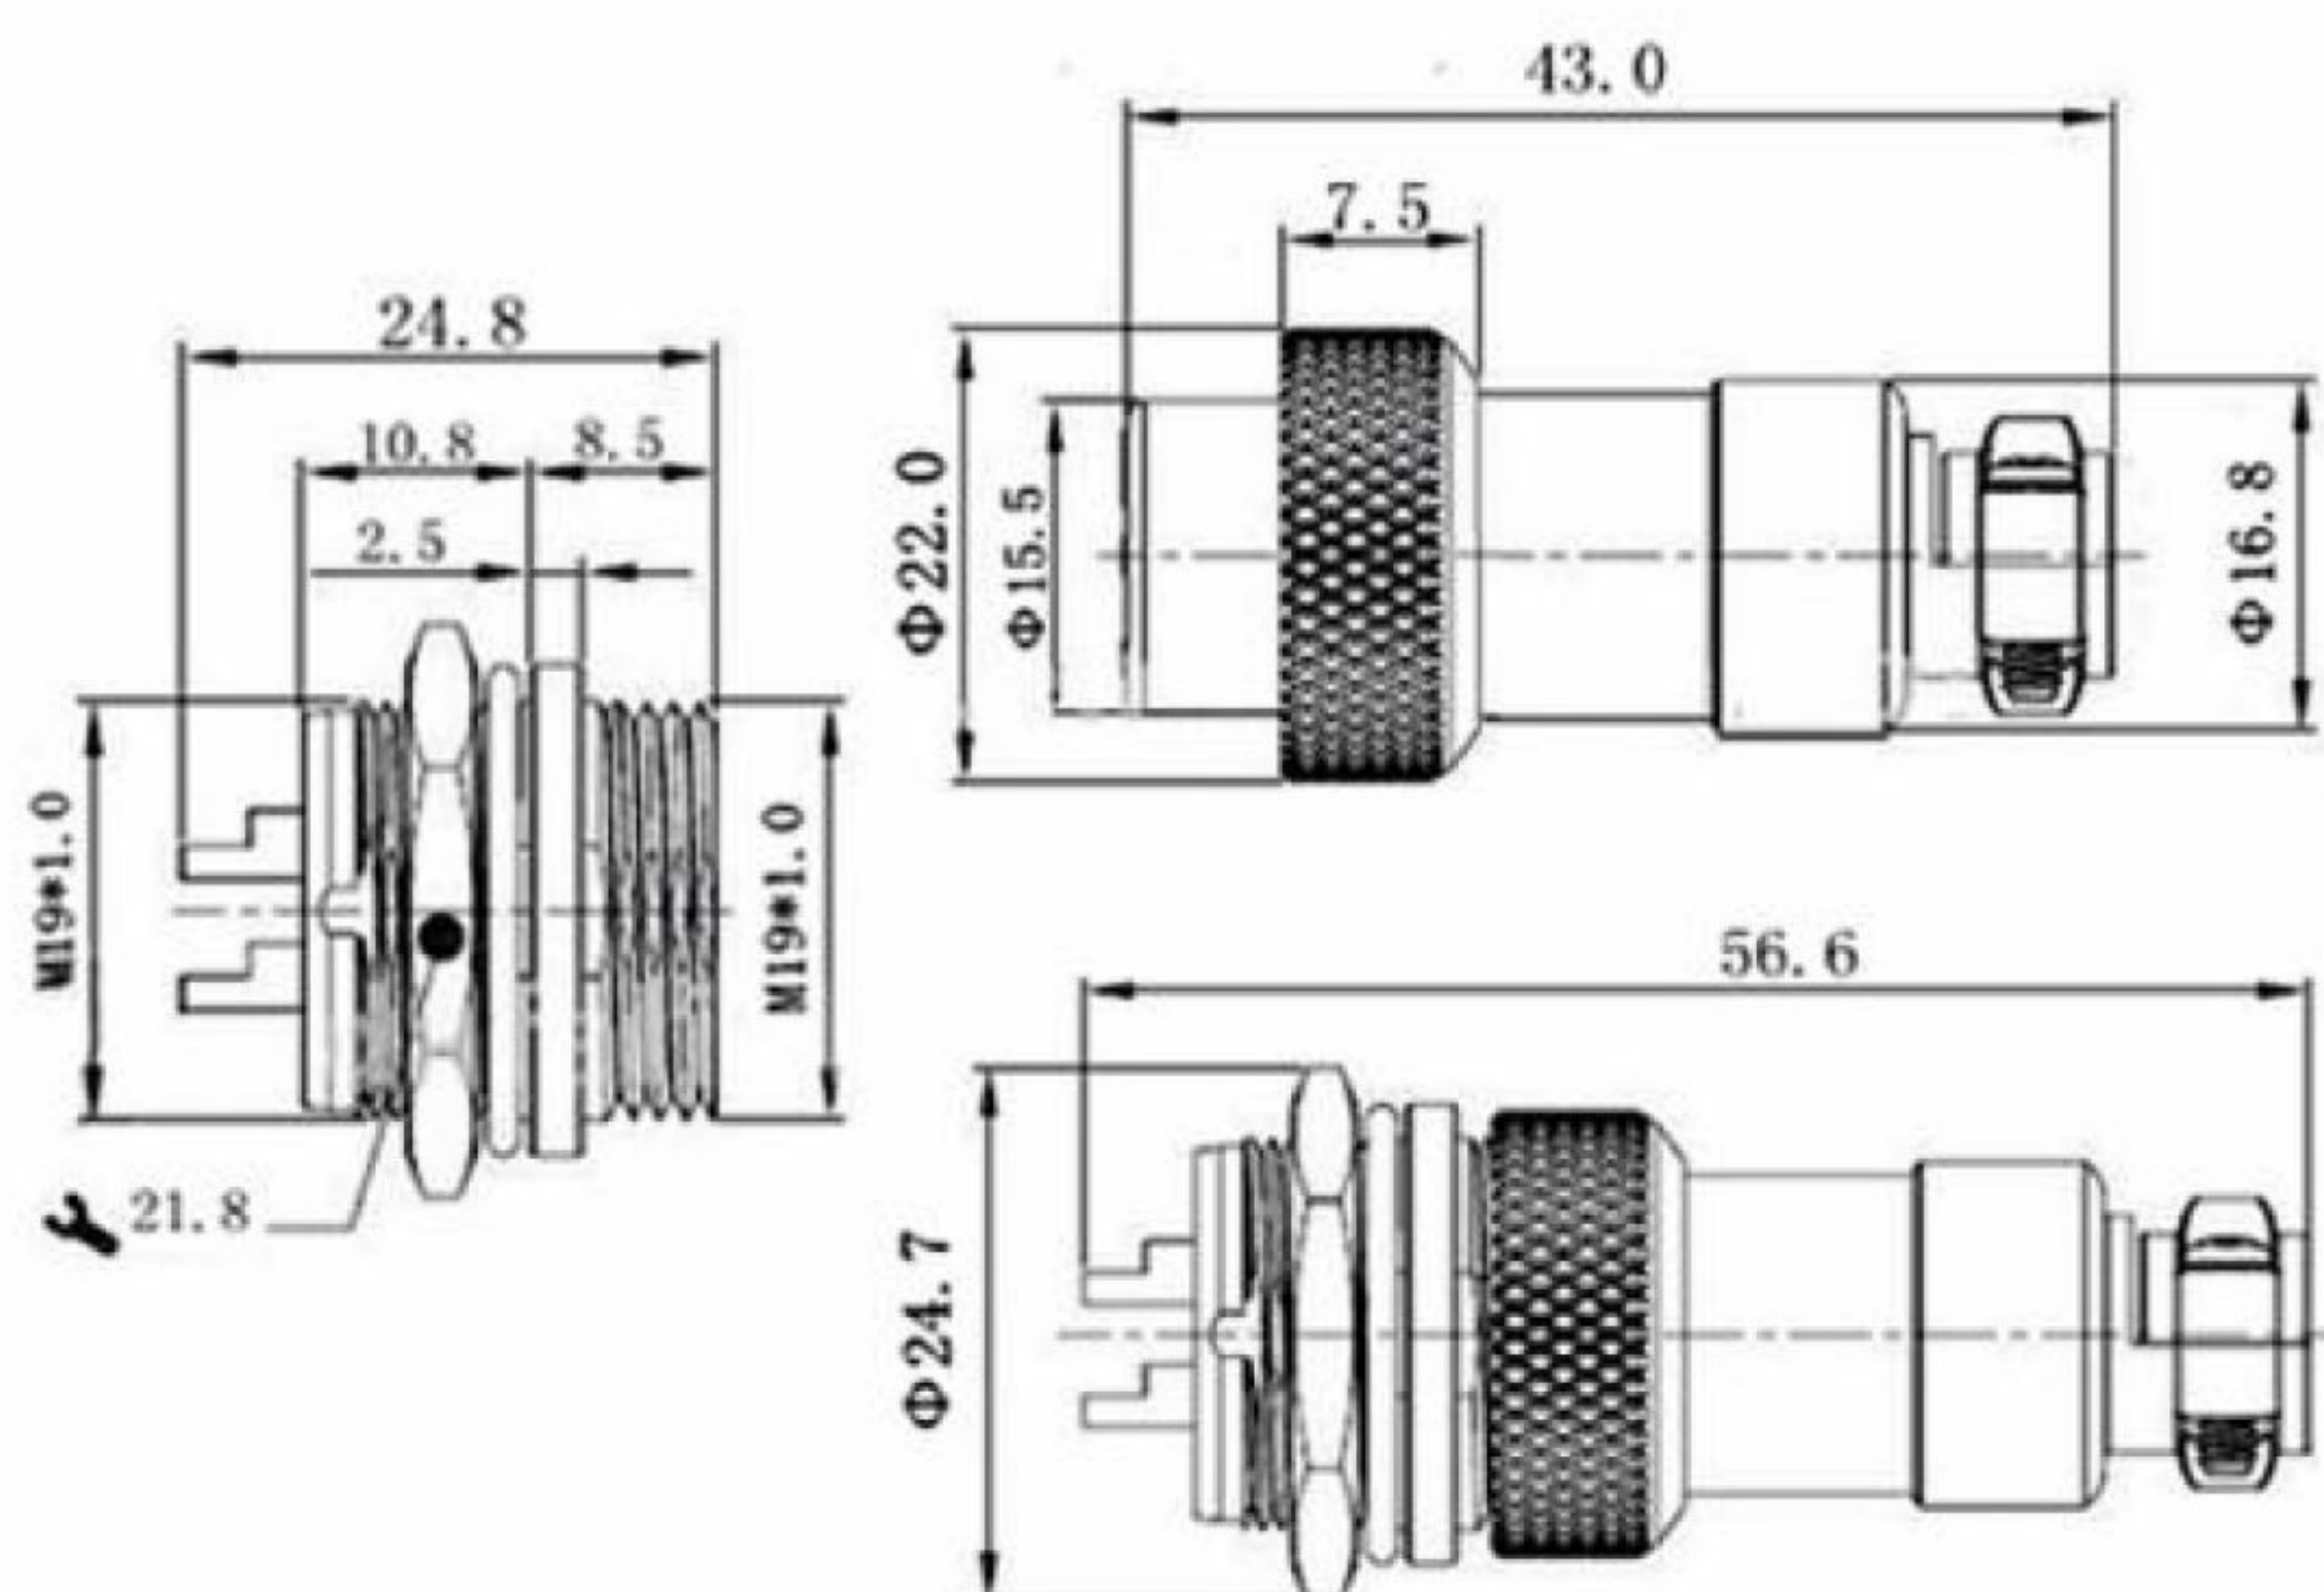


Material and Specifications

Coupling	Threaded Coupling	Termination	Solder
Shell Material	Zinc Alloy with Nickel plated	Mating Cycle	500 Times
Insert Material	Bakelite	Temperature Range	-20°C ~ +85°C
Contact Material	Copper (Silver plated/Gold)	Cable Diameter	≤ Φ9.5mm
		Protection Degree	IP55

Core Number	2 Core	3 Core	4 Core	5 Core	6 Core	7 Core	8 Core	9 Core	10 Core	12 Core
Contact Arrangement										
Contact The Diameter, Number	φ 2.5*2	φ 2.5*3	φ 2.5*4	φ 2*5	φ 1.2*6	φ 1.2*7	φ 1.2*8	φ 1.2*9	φ 1.2*10	φ 1.2*12
Rated Current(A)	10	10	10	7	5	5	5	5	5	5
Working Voltage (AC,V,RMS)	400	400	400	400	400	400	400	400	400	400

Order P/N

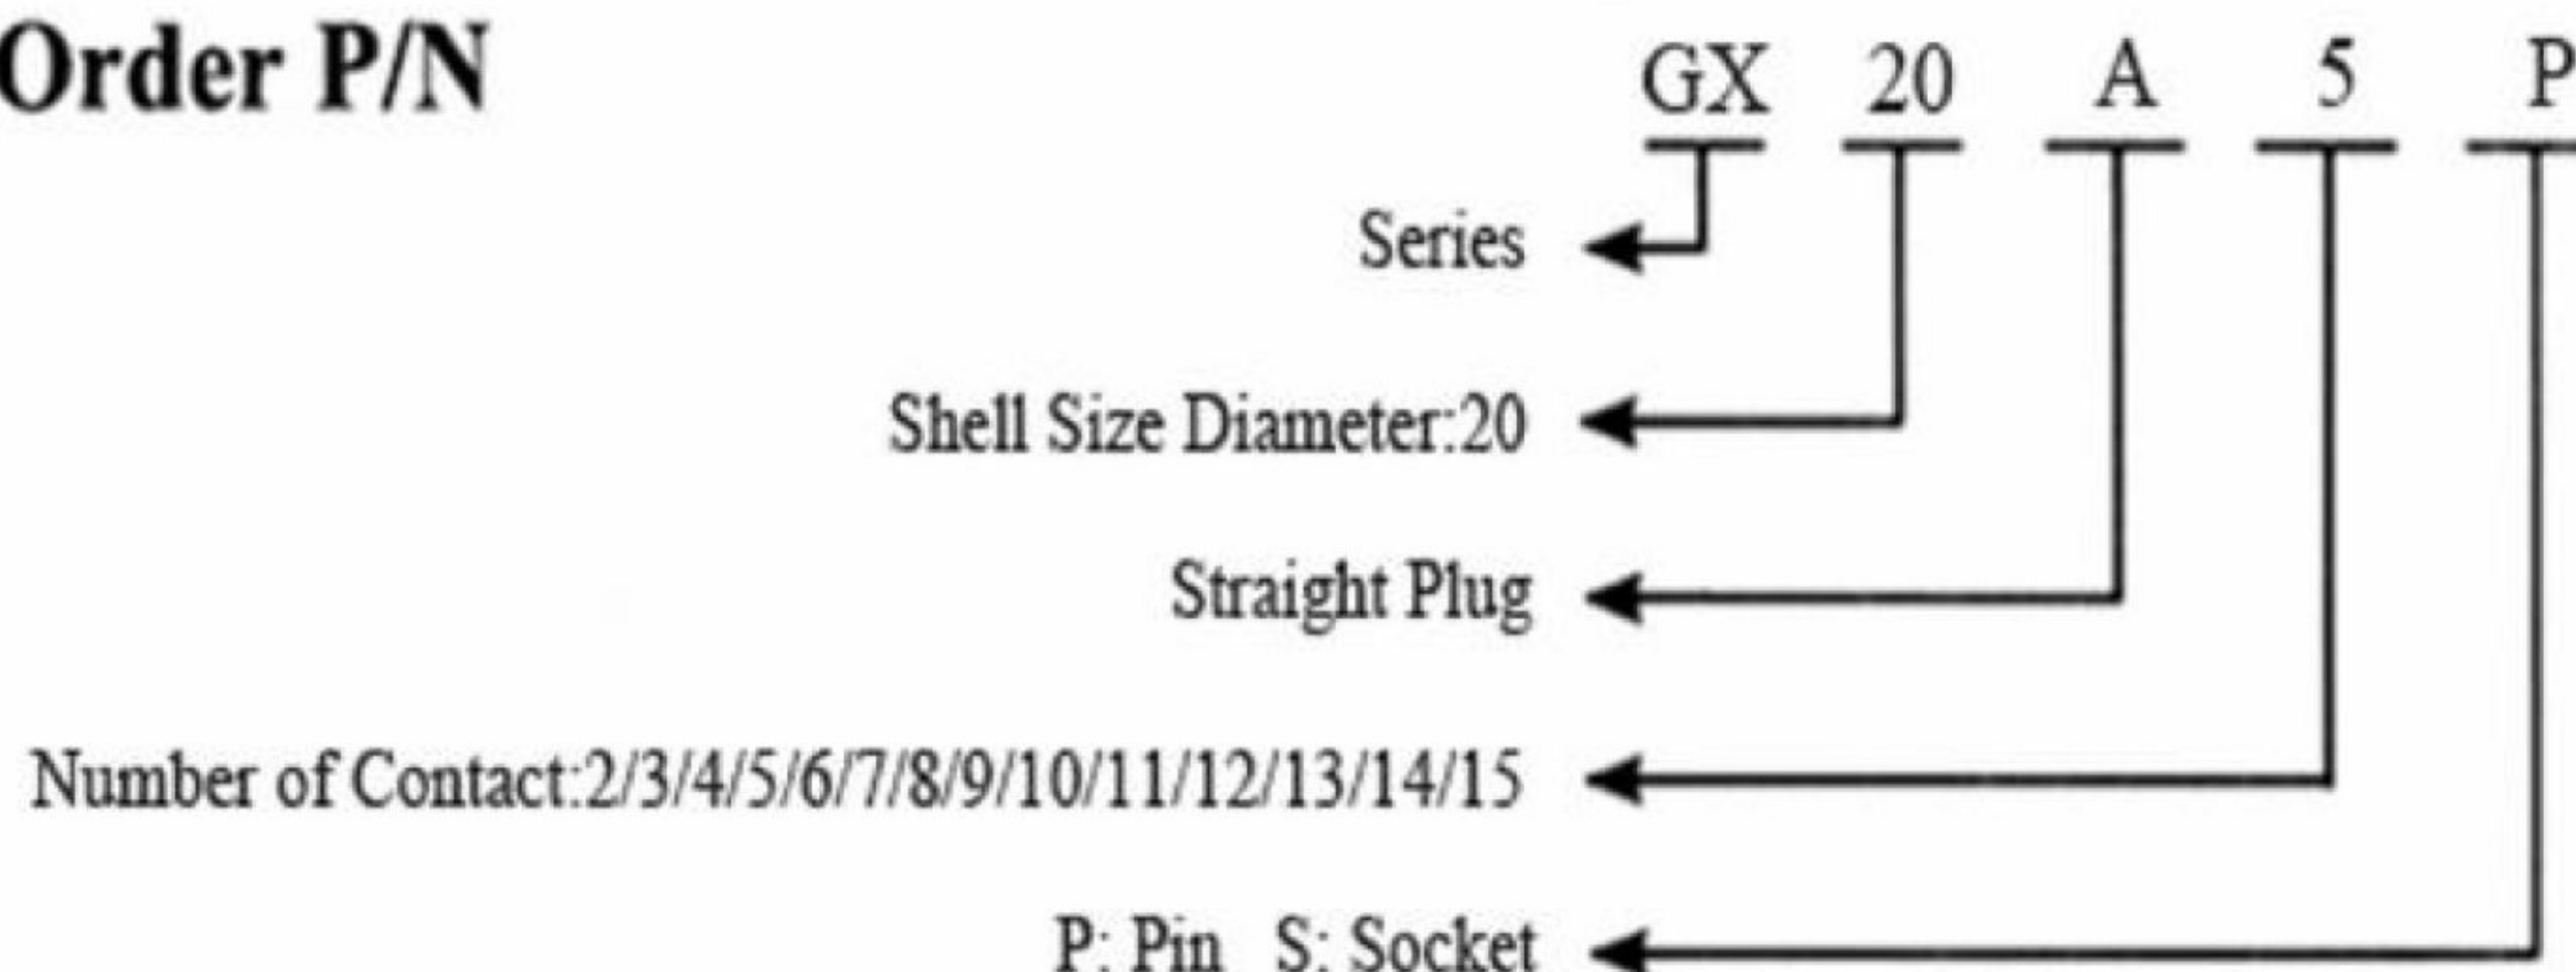

Note:

- A: Straight Plug
- B: Panel Mount Socket
- K: Docking Cable Plug
- D: Angled Plug
- E: 3 Hole Circular Flange
- F: Bulkhead
- H: 4 Hole Square Flange