

DŁAWIKI PG I METRYCZNE MG


NORMA PN-EN 62444:2014-01

Dławiki PG

Numer katalogowy		Typ	Ø montażu	D1	D2	B1	L1	L2	L3	Ø przewodu	Klucz	IP	 #
Kolor szary	Kolor czarny NOWOŚĆ	[-]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[-]	[-]
D.3070	D.3070C	PG-7	12,5	12,3	8,3	6,5	8,0	20,2	14,7	3,5-6,0	16/18	68	50
D.3071	D.3071C	PG-9	15,2	15,2	11,0	8,0	9,5	21,0	15,7	6,0-8,0	18/22	68	50
D.3072	D.3072C	PG-11	18,3	18,2	13,5	9,5	8,5	23,0	17,2	8,0-10,0	22/24	68	50
D.3073	D.3073C	PG-13,5	19,5	20	15,7	12,0	9,0	24,2	18,2	10,0-12,0	24/26	68	50
D.3074	D.3074C	PG-16	22,5	22,2	17,8	13,0	11,0	25,5	18,2	12,0-14,0	26/30	68	50
D.3075	D.3075C	PG-21	28,2	28,2	22,8	18,0	11,0	28,7	22,0	14,0-18,0	32/36	68	50
D.3076	D.3076C	PG-29	37,2	36,7	31,0	27,5	12,0	32,0	24,0	18,0-25,0	42/45	68	10
D.3077	-	PG-36	47,2	46,8	40,2	34,5	15,5	39,0	27,2	25,0-32,0	51/58	68	10
D.3078	-	PG-42	53,9	52,2	46,5	39,6	15,2	44,1	30,5	32,0-38,0	60/64	67	10
D.3079	-	PG-48	59,3	58,2	49,0	45,1	15,2	48	30,0	38,0-44,0	64/68	67	10

Dławiki metryczne MG

Numer katalogowy	Typ	Ø montażu	D1	D2	B1	L1	L2	L3	Ø przewodu	Klucz	IP	#
[-]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[-]	[-]
D.3088	M12	12,0	10,0	8,0	6,0	7,5	18,5	15,5	3,0-6,5	16/18	67	25
D.3089	M16	16,0	15,7	11,0	8,0	9,5	21,0	15,7	6,5-8,0	19/22	68	50
D.3080	M20	20,0	19,8	15,6	12,0	9,0	24,2	18,2	8,0-10,0	24/27	68	25
D.3081	M25	24,0	23,5	19,0	18,0	11,0	28,5	22,0	12,0-18,0	32/32	68	25
D.3082	M32	32,0	31,7	25,8	22,0	12,8	29,9	23,0	18,0-24,0	36/38	68	10
D.3083	M40	40,0	40,0	33,5	36,0	13,0	38,7	27,2	24,0-32,0	51/50	68	10
D.3090	M50	50,0	38,0	38,0	40,0	14,0	40,2	32,5	32,0-38,0	60/68	67	10
D.3091	M63	63,0	63,0	57,0	46,0	18,0	42,7	32,5	38,0-45,0	70/76	68	10

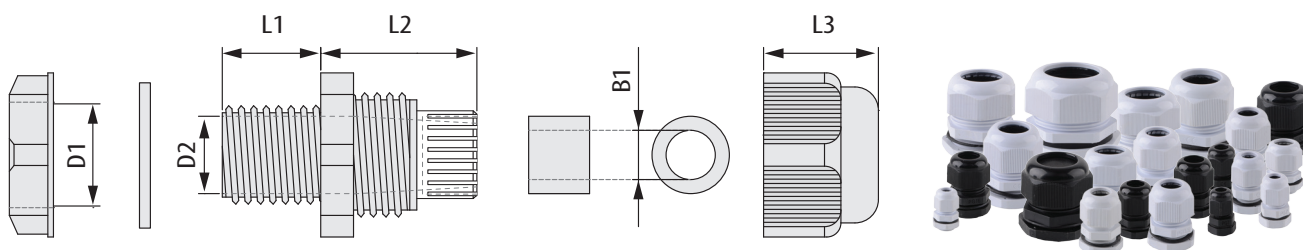

Dławiki gumowe PG

Numer katalogowy		Typ	Ø montażu	Norma	 #
kolor szary	kolor biały	[-]	[mm]	[-]	[-]
D.3410	D.3410B	PG-13,5	20,5	DIN 40430	100
D.3411	-	PG-16	22	DIN 40430	100
D.3412	-	PG-21	29	DIN 40430	100
D.3413	-	PG-29	37	DIN 40430	100

